


QV30 series crossflow fans 24V DC, over 420mm in length.

- 24V DC brushless motor (BLDC/EC)
- 12V DC also available
- With or without 0-10V DC speed control function
- Motor featuring 3-phase commutation for low noise
- Ball bearings used in motor and impellers
- Enhanced solution for quiet running, minimal vibration, and long life
- Options include finger guard, black coating, special lengths, electrical connector plug

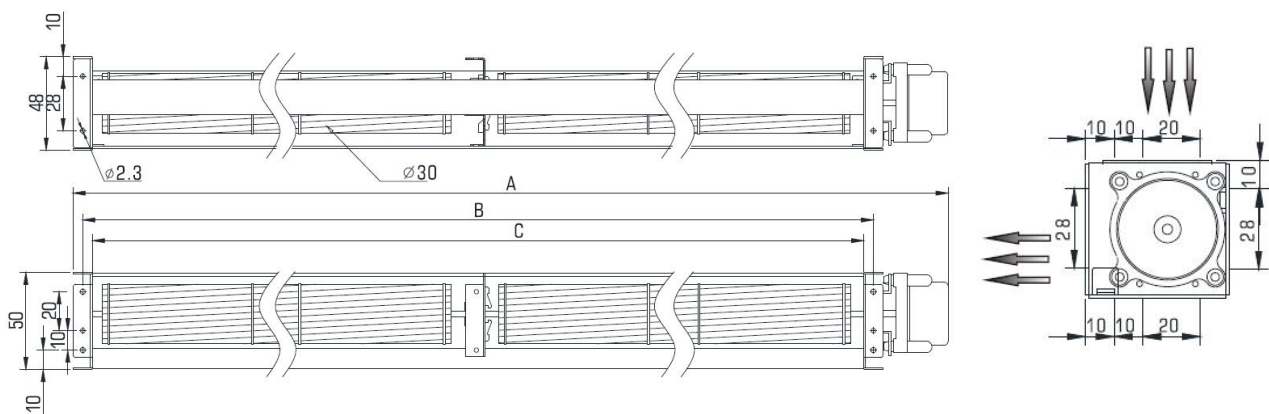

*All dimensions (mm)

QV30, 24V DC, over 420mm in length.

Model:	Dimensions (mm)			No. of impellers	Voltage	Current	Speed	Maximum Pressure	Maximum Airflow	Noise
	A	B	C							
QV/L/30/530	584	540	530	2	24V / DC	0.12	2400	18	85	32
QV/L/30/610	664	620	610	2	24V / DC	0.16	2400	18	100	33
QV/L/30/650	704	660	650	2	24V / DC	0.17	2400	17	105	34
QV/L/30/718	772	728	718	2	24V / DC	0.18	2400	17	115	35
QV/L/30/800	854	810	800	3	24V / DC	0.19	2400	17	130	36
QV/L/30/854	908	864	854	3	24V / DC	0.22	2400	17	140	36
QV/L/30/920	974	930	920	3	24V / DC	0.24	2400	17	150	37
QV/L/30/986	1040	996	986	3	24V / DC	0.27	2400	17	160	37
QV/L/30/1082	1136	1092	1082	3	24V / DC	0.31	2400	17	175	38

Other lengths, fan speeds, and special versions available on request. Minimum order quantities apply. Please contact us with your requirements.