


QV60 series crossflow fans 24V DC, over 430mm in length

- 24V DC brushless motor (BLDC/EC)
- 12V DC also available
- With or without 0-10V DC speed control function
- Motor featuring 3-phase commutation for low noise
- Ball bearings used in motor and impellers
- Enhanced solution for quiet running, minimal vibration, and long life
- Options include finger guard, black coating, special lengths, electrical connector plug

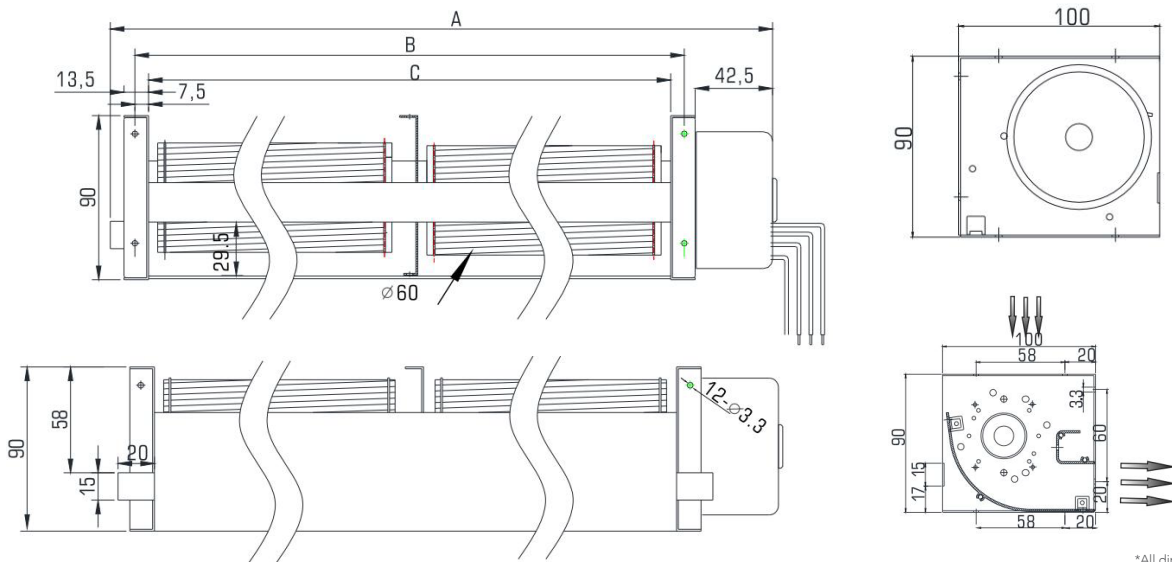

*All dimensions (mm)

QV60, 24V DC, over 430mm in length.

| Model: | Dimensions (mm) | | | No. of impellers | Voltage | Current | Speed | Maximum Pressure | Maximum Airflow | Noise |
|--------------|-----------------|------|------|------------------|----------|---------|-------|------------------|-----------------|--------|
| | A | B | C | Qty | V/Hz | A | rpm | Pa | m3/h | db (A) |
| QV/L/60/520 | 600 | 535 | 520 | 1 | 24V / DC | 0.6 | 1800 | 50 | 330 | 47 |
| QV/L/60/610 | 690 | 625 | 610 | 1 | 24V / DC | 0.6 | 1800 | 50 | 380 | 47 |
| QV/L/60/640 | 720 | 655 | 640 | 2 | 24V / DC | 0.1 | 1800 | 52 | 400 | 48 |
| QV/L/60/700 | 780 | 715 | 700 | 2 | 24V / DC | 0.7 | 1800 | 52 | 440 | 48 |
| QV/L/60/750 | 830 | 765 | 750 | 2 | 24V / DC | 0.8 | 1800 | 52 | 470 | 48 |
| QV/L/60/870 | 950 | 885 | 870 | 2 | 24V / DC | 1.0 | 1800 | 52 | 550 | 49 |
| QV/L/60/1105 | 1185 | 1120 | 1105 | 3 | 24V / DC | 1.5 | 1800 | 60 | 630 | 52 |
| QV/L/60/1305 | 1385 | 1320 | 1305 | 3 | 24V / DC | 2.2 | 1800 | 60 | 820 | 54 |

Other lengths, fan speeds, and special versions available on request. Minimum order quantities apply. Please contact us with your requirements.