



QV60 series crossflow fans 24V DC, up to 430mm in length

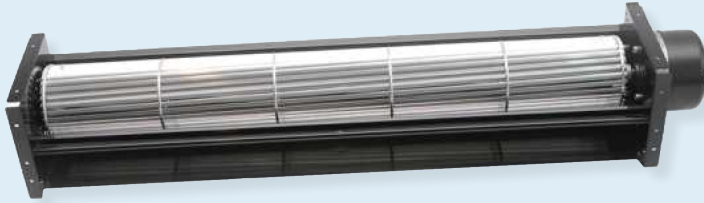

- 24V DC brushless motor (BLDC/EC)
- 12V DC also available
- With or without 0-10V DC speed control function
- Motor featuring 3-phase commutation for low noise
- Ball bearings used in motor and impellers
- Enhanced solution for quiet running, minimal vibration, and long life
- Options include finger guard, black coating, special lengths, electrical connector plug

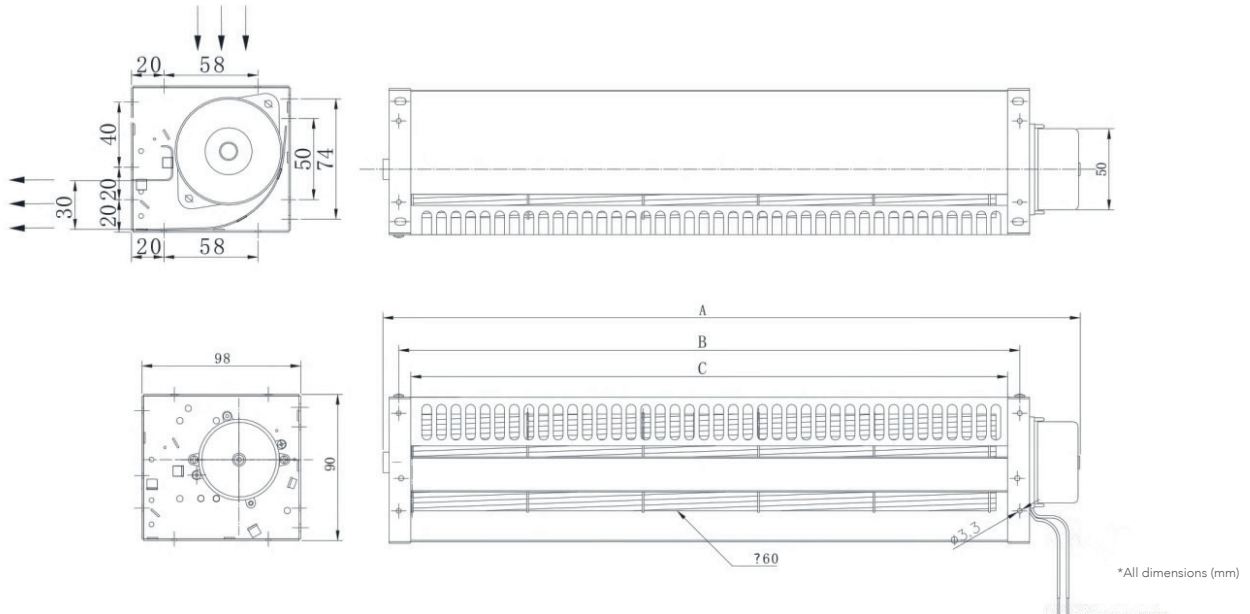

QV60, 24V DC, up to 430mm in length.

Model:	Dimensions (mm)			No. of impellers	Voltage	Current	Speed	Maximum Pressure	Maximum Airflow	Noise
	A	B	C	Qty	V/Hz	A	rpm	Pa	m3/h	db (A)
QV/L/60/123	186	138	123	1	24V / DC	0.45	2600	52	102	45
QV/L/60/184	246	199	184	1	24V / DC	0.47	2350	47	145	45
QV/L/60/245	307	259	245	1	24V / DC	0.55	2200	43	210	45
QV/L/60/306	368	321	306	1	24V / DC	0.63	2000	41	240	43
QV/L/60/368	430	383	368	1	24V / DC	0.67	1900	38	280	42
QV/L/60/429	492	444	429	1	24V / DC	0.73	1800	36	290	42

Other lengths, fan speeds, and special versions available on request. Minimum order quantities apply. Please contact us with your requirements.