


QV65 series crossflow fans 24V DC, over 430mm in length

- 24V DC brushless motor (BLDC/EC)
- 12V DC also available
- With or without 0-10V DC speed control function
- Motor featuring 3-phase commutation for low noise
- Ball bearings used in motor and impellers
- Enhanced solution for quiet running, minimal vibration, and long life
- Options include finger guard, black coating, special lengths, electrical connector plug

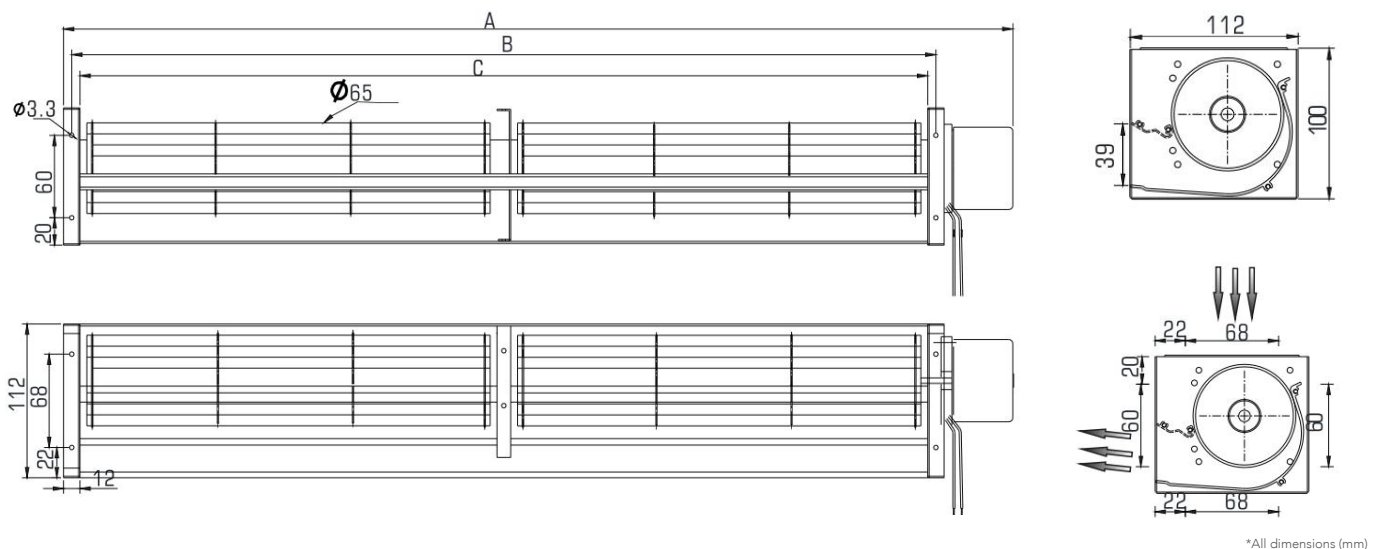

QV65, 24V DC, over 430mm in length

Model:	Dimensions (mm)			No. of impellers	Voltage	Current	Speed	Maximum Pressure	Maximum Airflow	Noise
	A	B	C	Qty	V/Hz	A	rpm	Pa	m3/h	db (A)
QV/L/65/520	589	534	520	1	24V / DC	1.20	1800	64	705	50
QV/L/65/620	689	634	620	1	24V / DC	1.25	1800	64	825	51
QV/L/65/720	789	734	720	2	24V / DC	1.30	1800	63	860	50
QV/L/65/750	819	764	750	2	24V / DC	1.40	1800	64	880	50
QV/L/65/820	889	834	820	2	24V / DC	1.50	1800	65	920	53
QV/L/65/870	939	884	870	2	24V / DC	1.60	1800	65	970	53
QV/L/65/1105	1174	1119	1105	3	24V / DC	4.20	1600	55	1225	56
QV/L/65/1305	1374	1319	1305	3	24V / DC	4.20	1600	55	1445	56

Other lengths, fan speeds, and special versions available on request. Minimum order quantities apply. Please contact us with your requirements.